


NOTES

1. THIS CURB MAY ONLY BE USED WITH THE APPROVAL OF CITY ENGINEER.
2. CONCRETE TO BE A3 IF CAST IN PLACE, 4000 PSI IF PRECAST.
3. THE DEPTH OF CURB MAY BE REDUCED AS MUCH AS 3" (15" DEPTH OR INCREASED AS MUCH AS 3" (21" DEPTH) IN ORDER THAT THE BOTTOM OF THE CURB WILL COINCIDE WITH THE TOP COURSE OF THE PAVEMENT SUBSTRUCTURE. OTHERWISE THE DEPTH IS TO BE 18" AS SHOWN.
4. THIS CURB IS TO BE USED WHEN DESIGN SPEED IS 45 MPH OR LESS IN DEVELOPED URBAN AND SUBURBAN AREAS.

25.04F – STANDARD VDOT 6" CURB (CG-2)*

* PER 2001 VDOT ROAD AND BRIDGE STANDARDS OR LATEST REVISION

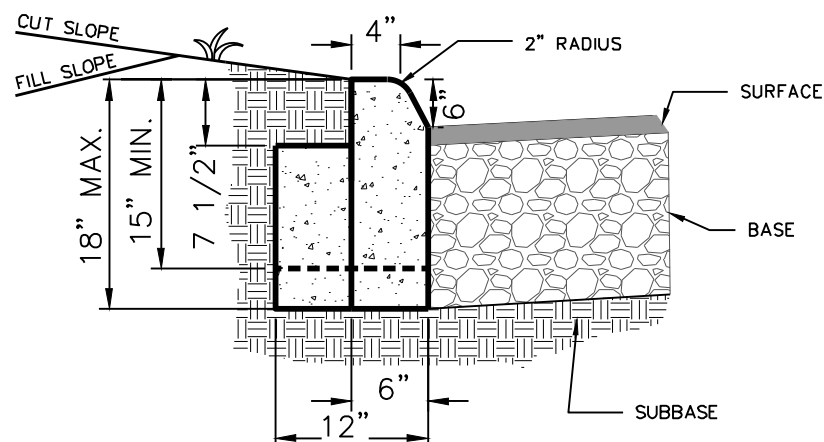

ALTERNATE 25.04F – STANDARD VDOT 6" CURB (CG-2)*

* PER 2001 VDOT ROAD AND BRIDGE STANDARDS OR LATEST REVISION



THE CITY OF LYNCHBURG

CURB & GUTTER DETAILS

USE WITH THE CITY OF LYNCHBURG STANDARD SPECIFICATIONS ONLY

SCALE:
NOT TO SCALE

REVISION DATE:
12-12-2014

DETAIL #
25.04

SHEET #:
5 OF 5